

FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

10 Series Row-Crop Tractors - 3010, 4010

ENGINE

OIL FILTER

[AR26350](#)

SEALING WASHER

[B3586R](#)

Replace every 200 hours, before and after winter season, and each time oil is changed.

(Click here for [capacity](#))

ENGINE

FUEL FILTER ELEMENT


(Diesel) [AR44077](#) - Qty. 2

SEALING WASHER

[R1021R](#)

Replace first stage filter every 600 hours.

(Click here for [capacity](#))

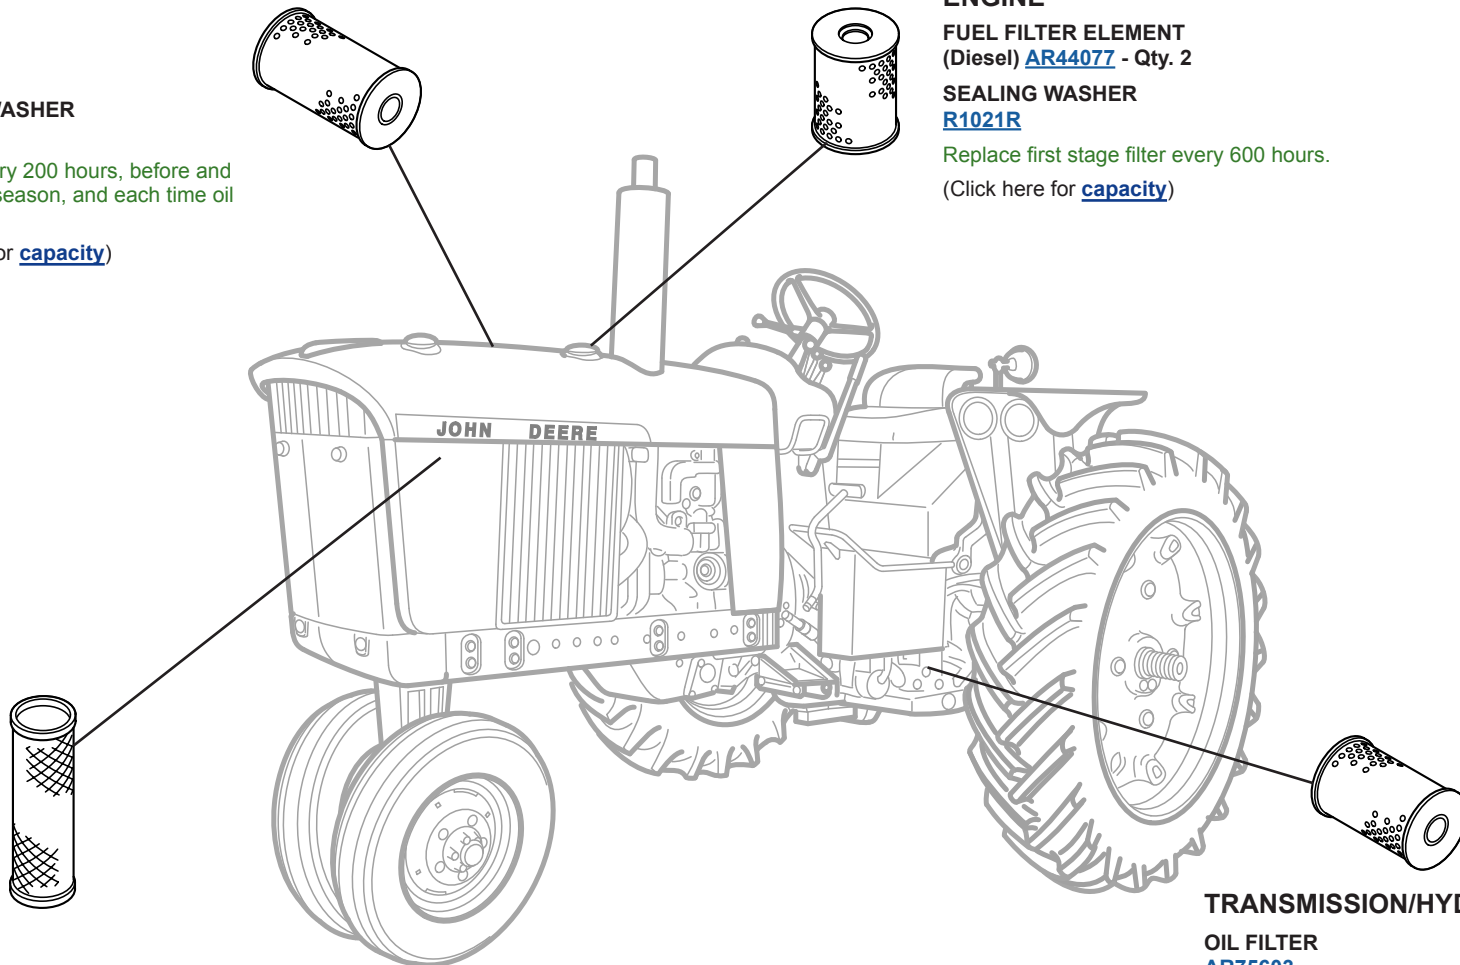

HYDRAULICS

FILTER ELEMENT

[R27173](#)

Clean valve filter every 1200 hours. See your John Deere dealer for service.

TRANSMISSION/HYDRAULIC

OIL FILTER

[AR75603](#)

SEALING WASHER

[R39596](#)

Replace after initial 200 hours, then every 600 hours.

(Click here for [capacity](#))



JOHN DEERE

Genuine Parts and Service

CAPACITIES

10 Series Row-Crop Tractors - 3010, 4010

CAPACITIES (Approximate):

Fuel Tank:

3010 (Diesel and gasoline).....	109.8 L (29 gal)
3010 (LP-Gas).....	94.6 L (25 gal)
4010 (Diesel and gasoline).....	128.7 L (34 gal)
4010 (LP-Gas).....	147.6 L (39 gal)

Cooling System:

Cool-Gard™ II

3010.....	15 L (4 gal)
4010 (Diesel).....	21.8 L (5.8 gal)
4010 (Gasoline and LP-Gas).....	22.7 L (6 gal)

Crankcase with Filter:

Torq-Gard™

.....	7.6 L (8 qt)
-------	--------------

Hydraulic System:

Hy-Gard™

3010.....	36 L (9.5 gal)
4010.....	41.6 L (11 gal)

[Return to Filter Overview](#)

