

FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

20 Series Row-Crop Tractors - 3020, 4000, 4020

ENGINE



PRIMARY AIR CLEANER

(3020, Diesel) [AR39798](#)
 (3020, Gas and LP-Gas) [AH19848](#)
 (4000, 4020, Diesel, TSN 201000-) [AT33363](#)
 (4000, 4020, Gas, TSN 201000-) [AR39798](#)
 (4000, 4020, LP-Gas, TSN 201000-) [AR44774](#)

PRIMARY AIR CLEANER WITHOUT PRE-CLEANER

(3020, Gas and Diesel, TSN 130000-) [AR46481](#)
 (4000, 4020, Gas and Diesel, TSN 201000-) [AR46976](#)

Check every 10 hours. Clean every 200 hours and as required.



HYDRAULICS

FILTER ELEMENT

[R27173](#)
 Clean valve filter every 1200 hours.
 See your John Deere dealer for service.



ENGINE

OIL FILTER


[AR26350](#)

SEALING WASHER

[B3586R](#)

Replace every 200 hours, before and after winter season, and each time oil is changed.

(Click here for [capacity](#))





ENGINE

FUEL FILTER (Diesel)

(3020 TSN -122999) [AR45098](#) - Qty. 2
 (3020 TSN 123000- , ESN 125000-280000) [AR44077](#) - Qty. 2
 (3020 TSN 123000- , ESN 280001-) [AR50041](#)
 (4020 TSN -200999, ESN -214999) [AR45098](#) - Qty. 2
 (4000, 4020 TSN 201000- , ESN 125000-280000) [AR44077](#) - Qty. 2
 (4000, 4020 TSN 201000- , ESN 280001-) [AR50041](#)

Replace as required.

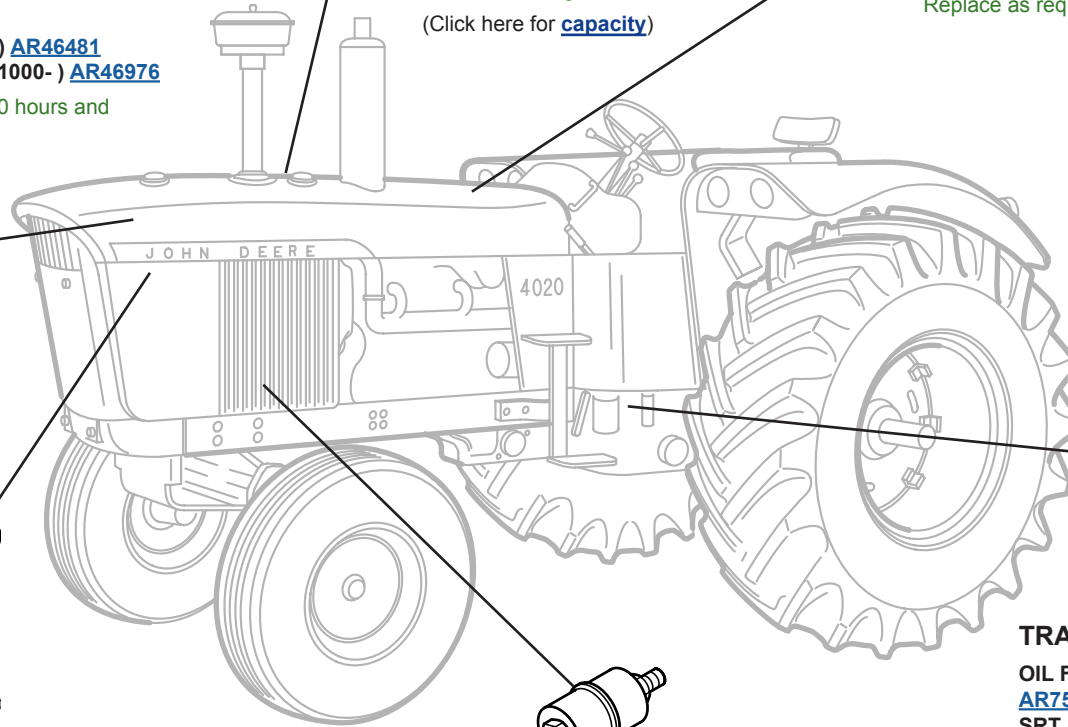

TRANSMISSION/HYDRAULIC

OIL FILTER

[AR75603](#)

SRT - Qty. 1

PST - Qty. 2

SEALING WASHER

(3020 TSN -067999, 4020 TSN -090999) [R39596](#)

(3020 TSN 068000- , 4020 TSN 091000- , 4000) [R34733](#)

Replace every 600 hours.

(Click here for [capacity](#))


ENGINE

FUEL FILTER (Gas)

(3020 TSN 123000-) [AR50141](#)

(4000, 4020 ESN 280001-) [AR50141](#)

Replace as required.



JOHN DEERE

Genuine Parts and Service

CAPACITIES

20 Series Row-Crop Tractors - 3020, 4000, 4020

CAPACITIES (Approximate):

Fuel Tank:

3020 (Diesel and gasoline).....	109.8 L (29 gal)
3020 (LP-Gas).....	127.2 L (33.6 gal)
4000, 4020 (Diesel and gasoline).....	128.7 L (34 gal)
4000, 4020 (LP-Gas).....	170.3 L (45 gal)

Cooling System:

Cool-Gard™ II

3020.....	18 L (4 gal)
4000, 4020.....	23 L (6 gal)

Crankcase with Filter:

Torq-Gard™

3020.....	7.6 L (8 qt)
4000 (Gas and LP-Gas).....	7.6 L (8 qt)
4000 (Diesel).....	11.4 L (3 gal)
4020 (Gas and LP-Gas, SN 91000-200999).....	7.6 L (8 qt)
4020 (Diesel, SN 201000-).....	11.4 L (3 gal)

Hydraulic System:

Hy-Gard™

PST:

3020.....	41.6 L (11 gal)
4000, 4020.....	53 L (14 gal)

SRT:

3020.....	30.9 L (8 gal)
4000, 4020.....	37.8 L (10 gal)

[Return to Filter Overview](#)

