

FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

4000 Series Compact Utility Tractors - 4100, 4200, 4300, 4400, 4500, 4600, 4700


ENGINE OIL FILTER

(4100) – [M806418](#)

(4200, 4300, 4400, 4500, 4600, 4700) – [M806419](#)

Replace after initial 50 hours, then every 200 hours.

(Click here for [capacity](#))

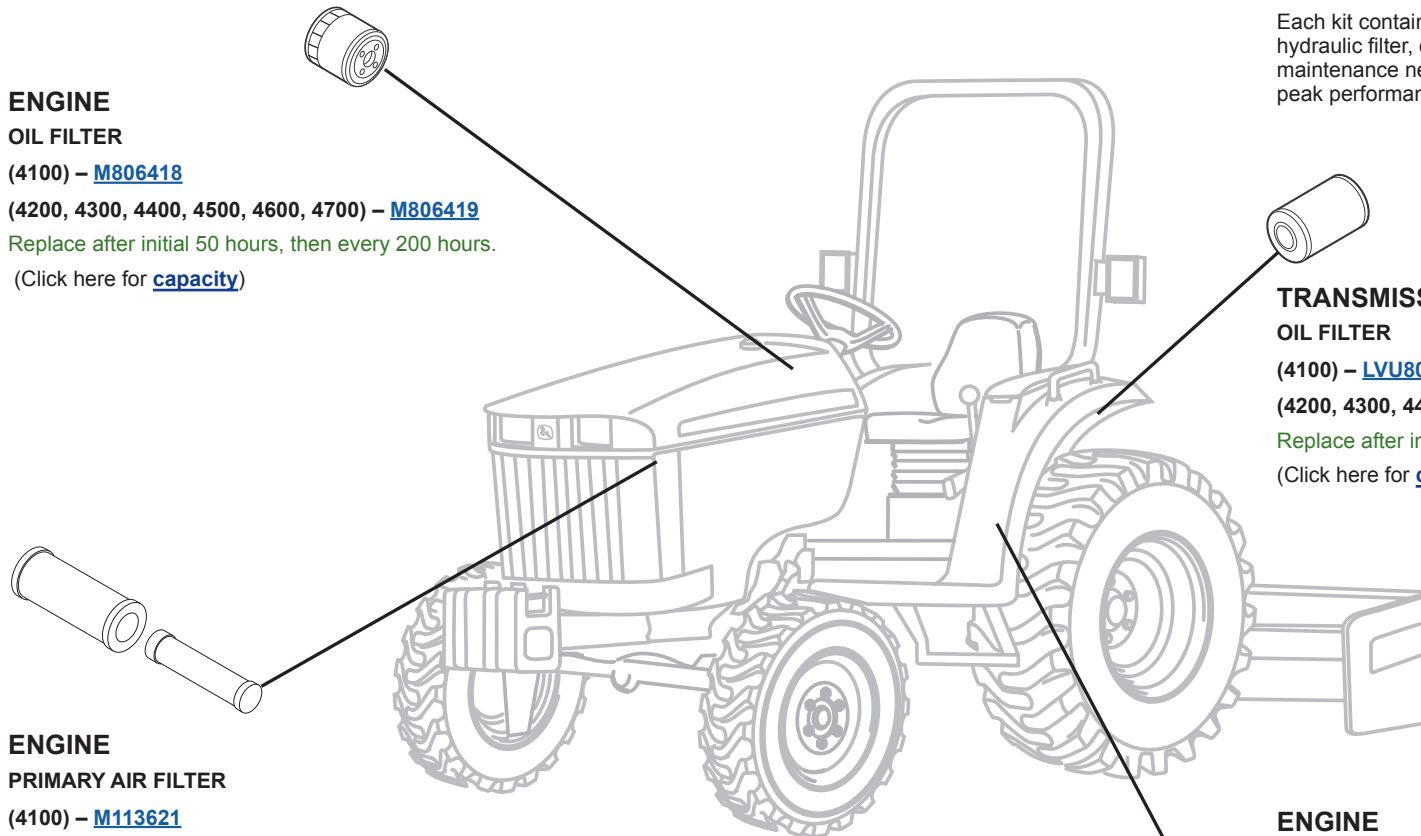

ENGINE PRIMARY AIR FILTER

(4100) – [M113621](#)

(4200, 4300, 4400, 4500, 4600, 4700) – [M131802](#)

SECONDARY AIR FILTER

(4100) – [M123378](#)

(4200, 4300, 4400, 4500, 4600, 4700) – [M131803](#)

Replace as required.

FILTER PAK

(4100) – [LVA21197](#)

(4200, 4300, 4400) – [LVA21198](#)

(4500, 4600, 4700) – [LVA21199](#)

Each kit contains oil filter, air filter, fuel filter, and hydraulic filter, offering a complete solution for your maintenance needs to keep your tractor running at peak performance.

TRANSMISSION / HYDRAULIC OIL FILTER

(4100) – [LVU800097](#)

(4200, 4300, 4400, 4500, 4600, 4700) – [LVA10419](#)

Replace after initial 50 hours, then every 200 hours.

(Click here for [capacity](#))

ENGINE FUEL FILTER

(4100) – [CH15553](#)

(4200, 4300, 4400) – [M801101](#)

(4500, 4600, 4700) – [T111383](#)

Replace every 500 hours.



CAPACITIES

4000 Series Compact Utility Tractors - 4100, 4200, 4300, 4400, 4500, 4600, 4700

CAPACITIES (Approximate):

Fuel Tank:

4100.....	22 L (5.8 gal)
4200, 4300, 4400.....	37.9 L (10 gal)
4500, 4600, 4700.....	47.5 L (12.6 gal)

Cooling System:

Cool-Gard™ II

4100.....	2.1 L (2.5 qt)
4200.....	5.3 L (5.6 qt)
4300, 4400.....	5.7 L (6.1 qt)
4500.....	6.8 L (7.2 qt)
4600, 4700.....	7.2 L (7.6 qt)

Crankcase with Filter:

Plus-50™ II

4100.....	2.7 L (2.9 qt)
4200.....	3.8 L (4 qt)
4300, 4400.....	4.3 L (4.5 qt)
4500, 4600, 4700.....	4.8 L (5.1 qt)

Transmission and Hydraulic System:

Low Viscosity Hy-Gard™

4100 (Gear Models).....	10.5 L (2.8 gal)
4100 (Hydrostatic Models).....	12.5 L (3.3 gal)
4200, 4300, 4400 (Gear Models).....	24 L (6.3 gal)
4200, 4300, 4400 (Hydrostatic Models).....	26 L (6.9 gal)
4500, 4600, 4700 (Gear Models).....	26 L (6.9 gal)
4500, 4600, 4700 (Hydrostatic Models).....	33.2 L (8.8 gal)

Front Axle:

GL-5 Lubricant 80W-90

4100.....	3.4 L (3.6 qt)
-----------	----------------

Low Viscosity Hy-Gard™

4200, 4300, 4400.....	4.5 L (4.8 qt)
4500, 4600, 4700.....	7.8 L (8.2 qt)

[Return to Filter Overview](#)

