


# FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

## 5M Series Tractors iT4 (5085M, 5100M, 5100MH, 5115M, 5115ML)

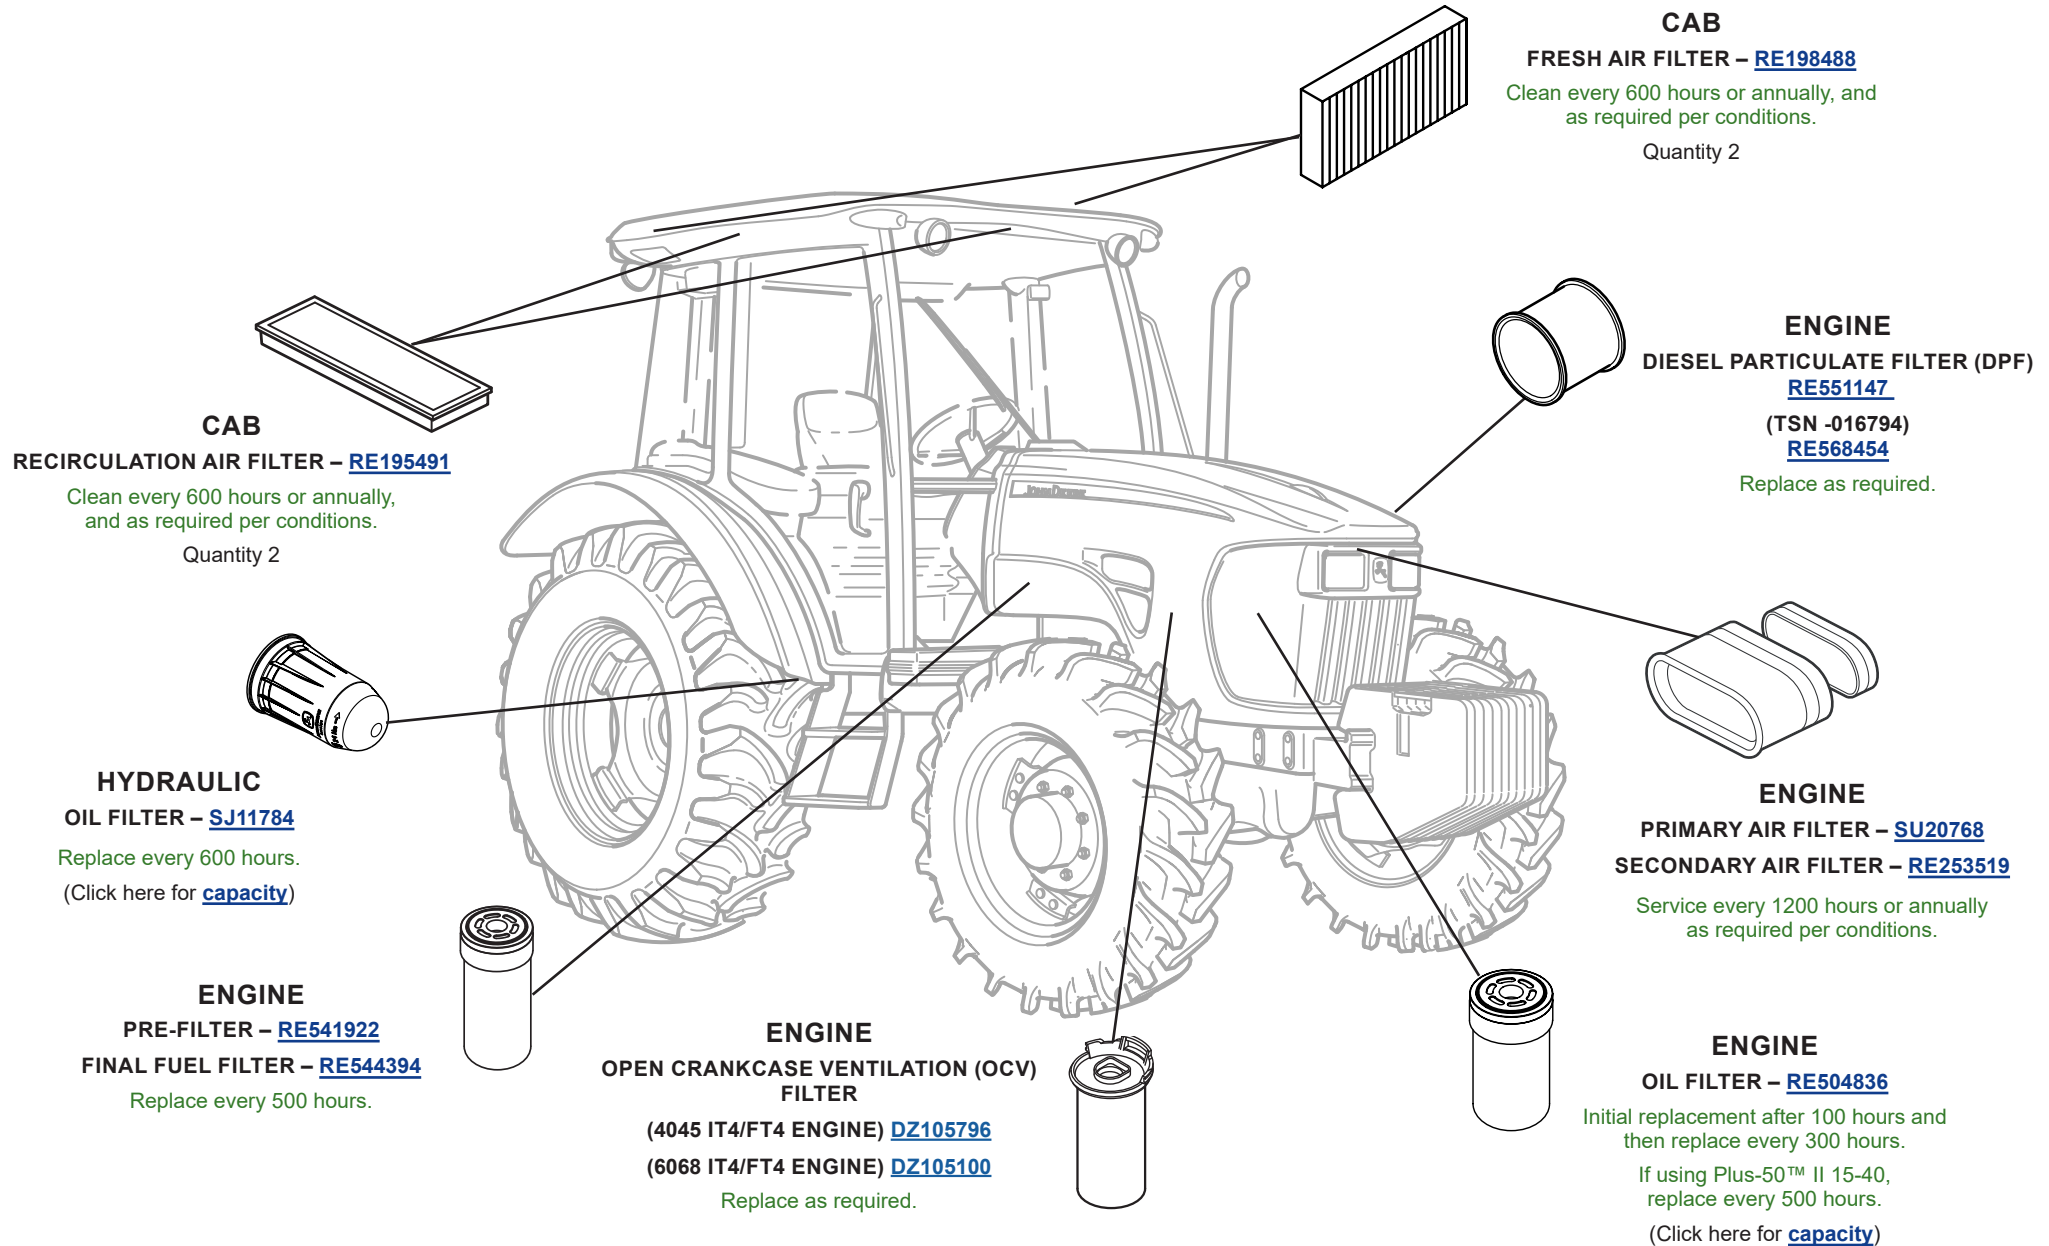

# CAPACITIES

## 5M Series Tractors iT4 (5085M, 5100M, 5100MH, 5115M, 5115ML)

### CAPACITIES (Approximate):

#### Fuel Tank:

5085M-5100M (Open Operator Station).....	113 L (30 gal)
5085M-5100M (Cab) .....	136 L (36 gal)
5115M-5115ML (Open Operator Station) .....	152 L (40 gal)
5115M (Cab).....	178 L (47 gal)
5100MH.....	139 L (37 gal)

#### Cooling System:

##### Cool-Gard™ II

Open Operation Station.....	15 L (4 gal)
Cab.....	17 L (4.5 gal)

#### Crankcase with Filter:

##### Plus-50™ II

.....	13 L (3.4 gal)
-------	----------------

#### Transmission and Hydraulic System:

##### Hy-Gard™

SyncShuttle™ Plus Transmission .....	53 L (14 gal)
Power Reverser™ or SyncReverser™ Transmission.....	53 L (14 gal)
Power Reverser™ Plus Transmission .....	53 L (14 gal)

#### Mechanical Front Wheel Drive (MFWD) Axle:

##### Hy-Gard™

Differential Housing .....	5 L (5.3 qt)
Wheel Hub (Each).....	0.8 L (0.8 qt)

#### Front PTO:

##### Hy-Gard™

.....	3.1 L (3.3 qt)
-------	----------------

[Return to Filter Overview](#)

