

FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

9000 Walker Series Combines


ENGINE

PRIMARY AIR FILTER
(9400 MSN -655288, 9500 MSN -645200,
9600 MSN -645300) – [AR80652](#)

PRIMARY AIR FILTER
(9400 MSN 655289-, 9500 MSN 645201-665977,
9600 MSN 645301-666172) – [AR70106](#)

PRIMARY AIR FILTER
(9500 MSN 665978-, 9600 MSN 666173-) – [AR95758](#)

Change annually and clean or change as required.




ENGINE

SECONDARY AIR FILTER
(9400 MSN -655288, 9500 MSN -645200,
9600 MSN -645300) – [AR80653](#)

SECONDARY AIR FILTER
(9400 MSN 655289-, 9500 MSN 645201-665977,
9600 MSN 645301-666172) – [AR70107](#)

SECONDARY AIR FILTER
(9500 MSN 665978-, 9600 MSN 666173-) – [AR95759](#)


Change only with primary filter.

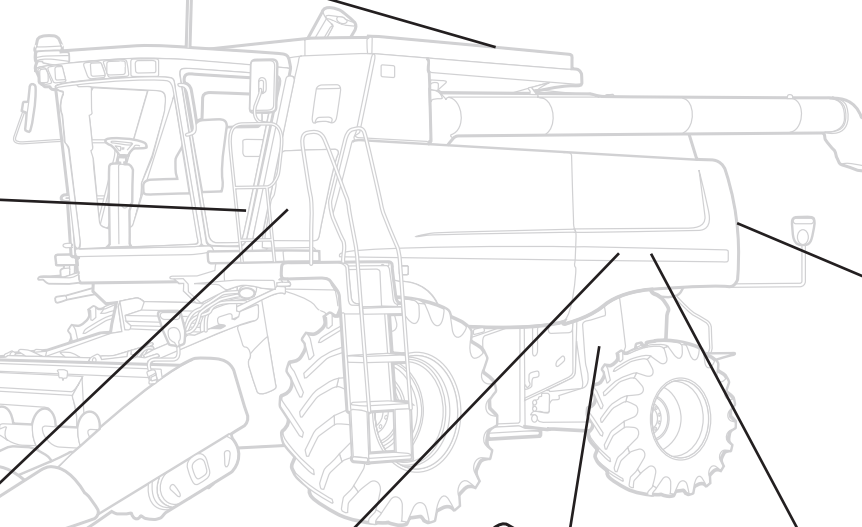

CAB

RECIRCULATION AIR FILTER
(9400 – 9600) – [AH115836](#)


Clean or replace every 200 hours
and as required.



CAB

AIR FILTER, STANDARD
(9400 – 9600) – [AH115833](#)

Clean or replace after 50 hours
and as required.



ENGINE

FUEL WATER SEPARATOR FILTER
(9400 – 9600) – [AT81478](#)

Replace every 500 hours
and as required.




**HYDRAULIC/HYDROSTATIC/
ENGINE GEARCASE**

FILTER ELEMENT
(9400 – 9600) – [AH128449](#)

Please order three.

Replace every 400 hours.

(Click here for [capacity](#))



ENGINE

OIL FILTER (9500, 9600) – [DZ101880](#)

**OIL FILTER (9400 ENGINE 6359T MSN
-640100) – [T19044](#)**

**OIL FILTER (9400 ENGINE 6068H MSN
640101-) – [RE59754](#)**

Replace every 250 hours
or once a season, whichever occurs first.
Fill crankcase with seasonal viscosity grade
oil or Torq-Gard Supreme™ (250 hours
change interval). If using Plus-50™ oil and a
John Deere filter, the service interval can be
extended by 50 percent.

Example: 250 hours extends to 375 hours.

(Click here for [capacity](#))



ENGINE

FUEL FILTER
(9400 ENGINE 6359T MSN -640100,
9500, 9600) – [AR86745](#)

FUEL FILTER
(9400 ENGINE 6068H MSN 640101-)
– [RE62419](#)

Replace every 500 hours
and as required.



JOHN DEERE

Genuine Parts and Service

CAPACITIES

9000 Walker Series Combines

CAPACITIES (Approximate):

Fuel Tank:

..... 530 L (140 gal)

**Cooling System with Heater:
Cool-Gard™II**

..... 35.5 L (9.4 gal)

**Engine Crankcase with Filter:
Plus-50™II**

9400..... 19 L (5 gal)

9500, 9600..... 25 L (6.7 gal)

**Transmission:
GL-5**

..... 9.6 L (10 qt)

**Final Drives (Each):
GL-5**

Ring and Pinion 8.5 L (9 qt)

Planetary 6.2 L (6.6 qt)

Feeder House Reverser Gearcase..... 0.9 L (1 qt)

Countershaft Drive Gearcase 1.4 L (1.5 qt)

Straw Walker Drive Gearcase 0.7 L (0.7 qt)

Loading Auger Gearcase..... 4.7 L (5 qt)

Dual-Range Cylinder Drive:

Torq-Gard™ 10W or Low Viscosity Hy-Gard™

Gearcase 1.9 L (2 qt)

Engine Gearcase..... 16 L (4.2 gal)

Hydraulic/Hydrostatic Reservoir 34 L (9 gal)

[Return to Filter Overview](#)

