


FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

9030 Series Wheel Tractors 9230, 9330, 9430, 9530, 9630

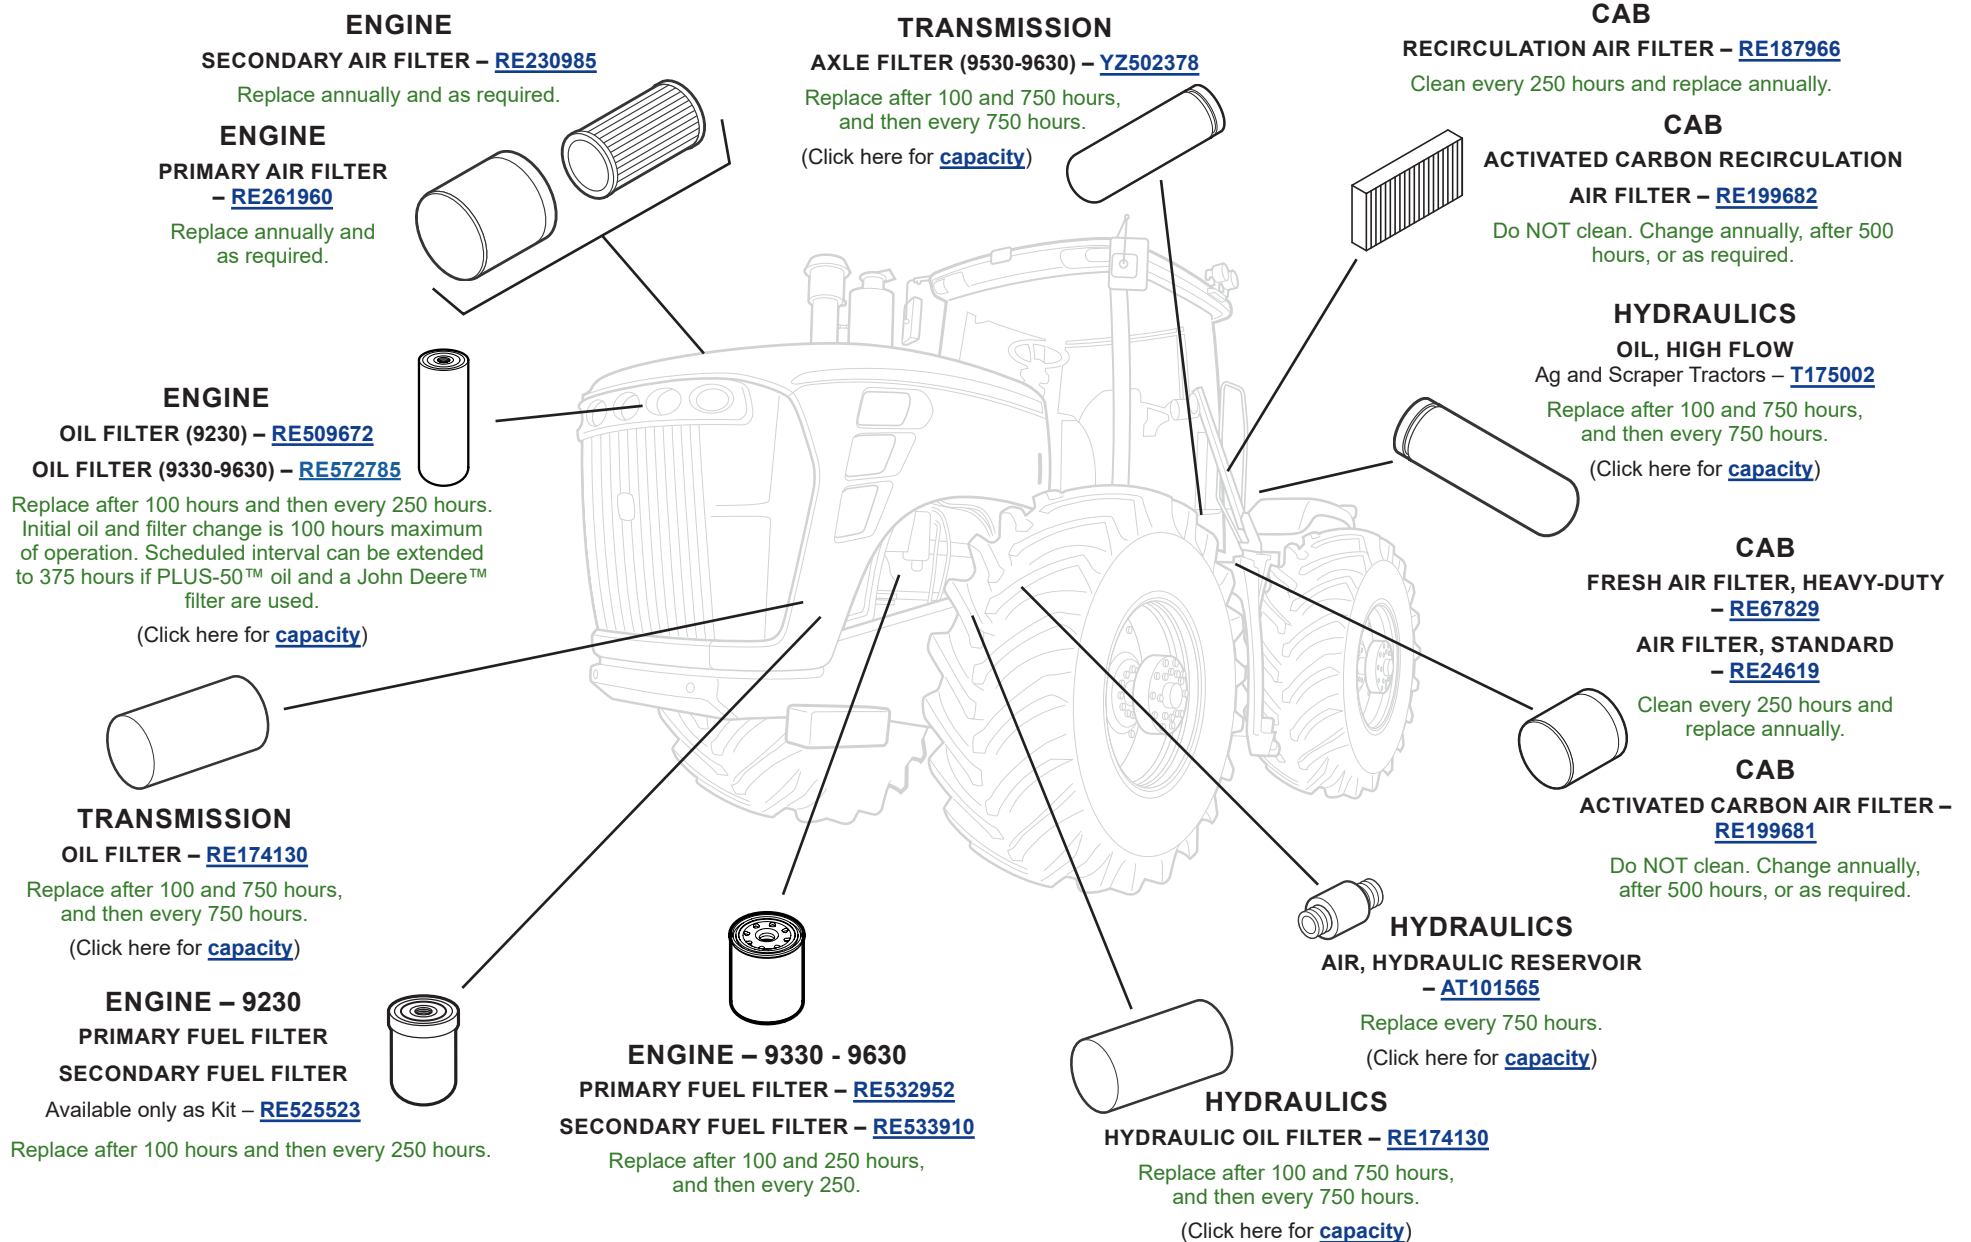

CAPACITIES

9030 Series Wheel Tractors 9230, 9330, 9430, 9530, 9630

CAPACITIES (Approximate):

Fuel Tank 1325 L (350 gal)

Cooling System including Overflow Tank:

Cool-Gard™ II

9230..... 47.5 L (12.5 gal)

9330-9430-9530-9630 53 L (14 gal)

Crankcase including Filter:

Plus-50™ II

9230..... 28 L (7.4 gal)

9330-9430 (SN 022000 -)..... 40 L (10.5 gal)

9330-9430 (SN - 021999)..... 42 L (11 gal)

9530-9630 (SN 022000 -)..... 56 L (14.8 gal)

9530-9630 (SN - 021999)..... 60 L (15.8 gal)

Transmission/Axle:

Hy-Gard™

24-Speed:

100 mm Axles Without PTO 140 L (37 gal)

100 mm Axles With PTO 144 L (38 gal)

110 mm Axles Without PTO 144 L (38 gal)

110 mm Axles With PTO 148 L (39 gal)

18-Speed Powershift:

100 mm Axles Without PTO 166.6 L (44 gal)

100 mm Axles With PTO 170.8 L (45 gal)

110 mm Axles Without PTO 170.8 L (45 gal)

110 mm Axles With PTO 174.5 L (46 gal)

120 mm Heavy-Duty Axles 87 L (23 gal)

Hydraulic System:

Hy-Gard™

Without Hitch - Standard 103 L (27 gal)

With Hitch - Standard 106 L (28 gal)

Without Hitch - High-Flow 113.5 L (30 gal)

With Hitch - High-Flow 117 L (31 gal)

[Return to Filter Overview](#)

