

# FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

## 2R Series Compact Utility Tractors - 2025R, 2032R, 2038R

### TRANSMISSION

#### OIL FILTER


(2025R) [LVA802810](#)

(2032R -MY16) [LVU800097](#)

(2032R MY17-, 2038R) [LVA14703](#)

Replace initially after 50 hours, then every 200 hours.

(Click here for [capacity](#))



### FILTER PACKS

(2025R) [LVA21204](#)

(2032R -MY16) [LVA21201](#)


Each kit contains two oil filters, one air filter, one fuel filter and one hydraulic filter, offering a complete solution for your maintenance needs to keep your tractor running at peak performance.

### ENGINE AIR FILTER ELEMENT

PRIMARY [M131802](#)

SECONDARY [M131803](#)

Replace as required per conditions.

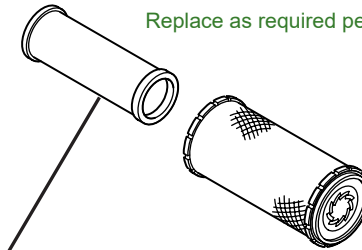

### HYDRAULIC

#### OIL FILTER

(2025R) [AL156625](#)

(2032R MY17-, 2038R) [LVA16054](#)

Replace initially after 50 hours, then every 200 hours.

(Click here for [capacity](#))




### ENGINE OIL FILTER

(2025R) [M806418](#)

(2032R, 2038R) [M806419](#)

Replace every 200 hours or annually, whichever occurs first.

(Click here for [capacity](#))



### FUEL FILTER

(2025R) [M801101](#)

Replace every 400 hours or annually, whichever occurs first.




### FUEL FILTER

PRIMARY (2032R, 2038R) [MIU800645](#)

Replace every 400 hours or annually, whichever occurs first.

SECONDARY (2032R, 2038R) [M811032](#)

Replace every 400 hours or annually, whichever occurs first.

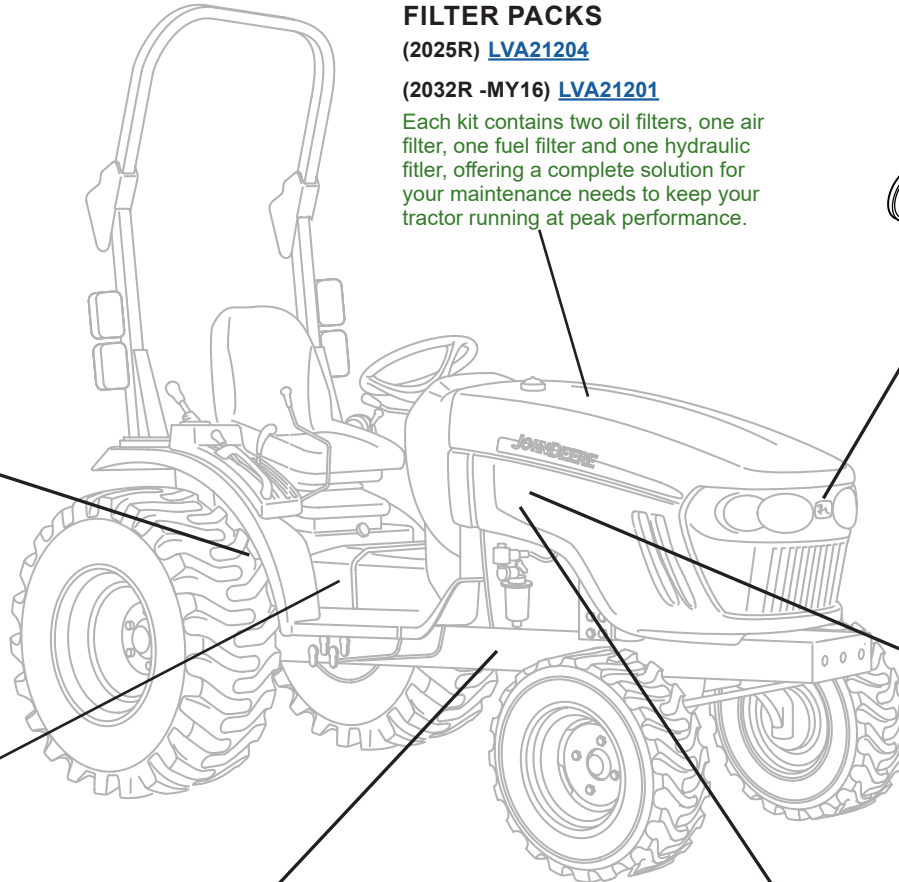

**JOHN DEERE**

Genuine Parts and Service

# CAPACITIES

## 2R Series Compact Utility Tractors - 2025R, 2032R, 2038R

### CAPACITIES (Approximate):

#### Fuel Tank:

2025R.....	23 L (6.1 gal)
2032R (-MY16).....	27 L (7.1 gal)
2032R (MY17-), 2038R .....	32 L (8.5 gal)

#### Cooling System:

##### Cool-Gard™ II

2025R.....	3.2 L (3.4 qt)
2032R.....	4.0 L (4.2 qt)

#### Crankcase with Filter:

##### Plus-50™

2025R.....	3.2 L (3.4 qt)
2032R (-MY16).....	3.4 L (3.6 qt)
2032R (MY17-), 2038R .....	4.5 L (4.8 qt)

#### Transmission and Hydraulic System:

##### Hy-Gard™

2025R.....	13.1 L (3.5 gal)
2032R.....	17.5 L (4.6 gal)

#### Front Axle:

##### GL-5

2025R.....	3.4 L (3.6 qt)
2032R.....	3.9 L (4.1 qt)

[Return to Filter Overview](#)