

# FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

## 55 Series Row-Crop Tractors - 4055, 4255, 4455, 4555, 4755, 4955

### ENGINE OIL FILTER


Replace every 250 hours or annually.  
(Click here for [capacity](#))



### ENGINE FUEL FILTER


[AR86745](#)  
FUEL STRAINER  
[AR103220](#)

Check every 10 hours or daily.  
Replace as required.



### CAB RECIRCULATION AIR FILTER


(STANDARD) [RE12793](#)  
(HEAVY-DUTY) [RE67830](#)  
Check every 250 hours.  
Replace annually and  
as required. Service as  
indicated on machine.



### ENGINE SECONDARY AIR FILTER


(4055, 4255, 4455)  
[AR79680](#)  
(4555, 4755 (SN -010000), 4955 (SN -010000))  
[AR80653](#)  
(4755 (SN 010001-), 4955 (SN 010001-))  
[RE46311](#)

Clean as required. Replace annually  
and as required.



### CAB FRESH AIR FILTER

Check every 250 hours.  
Replace annually and  
as required. Service as  
indicated on machine.



### ENGINE PRIMARY AIR FILTER


(4055, 4255, 4455)  
[AR79679](#)  
(4555, 4755 (SN -010000), 4955 (SN -010000))  
[AR80652](#)  
(4755 (SN 010001-), 4955 (SN 010001-))  
[RE46310](#)

Clean as required. Replace annually and as  
required.



### TRANSMISSION/HYDRAULIC CHARGE PUMP SUCTION SCREEN

[R53169](#) (Nylon)  
[AR26375](#) (Steel)




### RETURN OIL MANIFOLD SCREEN

[R27173](#)  
Clean filter every 1500 hours.


### TRANSMISSION/HYDRAULIC OIL FILTER

[AR94510](#)  
For QRT - Qty. 1  
For PST - Qty. 2  
([AR98098](#) may be used as a cleanup  
filter after a transmission failure)



### SEALING WASHER

[R34733](#)  
Replace as required or annually.  
(Click here for [capacity](#))

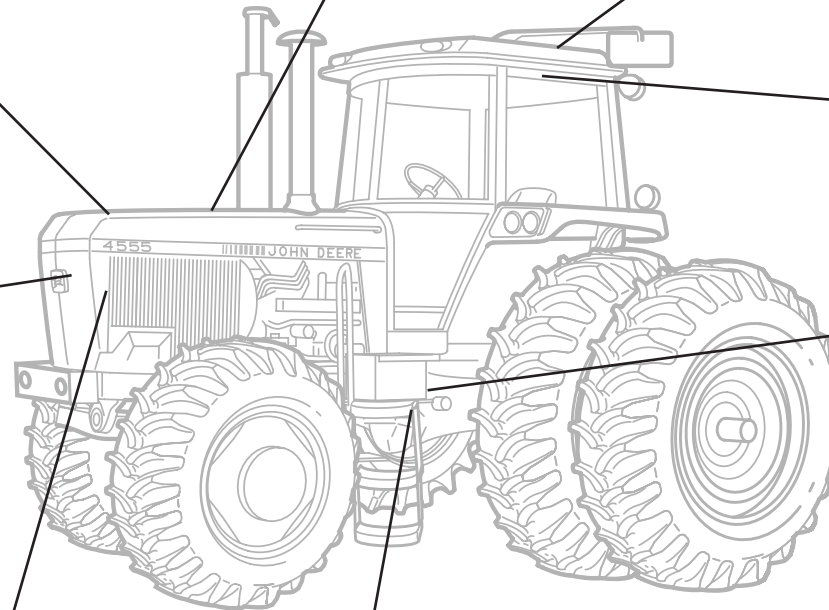

# CAPACITIES

## 55 Series Row-Crop Tractors - 4055, 4255, 4455, 4555, 4755, 4955

### CAPACITIES (Approximate):

#### **Fuel Tank:**

4055, 4255, 4455.....	246 L (65 gal)
4555, 4755, 4955.....	386 L (102 gal)

#### **Cooling System:**

##### **Cool-Gard™ II**

4055, 4255, 4455.....	25.6 L (6.8 gal)
4555, 4755, 4955.....	30.3 L (8 gal)

#### **Crankcase with Filter:**

##### **Plus-50™ II**

4055, 4255, 4455.....	18 L (4.8 gal)
4555, 4755, 4955.....	21 L (5.5 gal)

#### **Transmission (PST):**

##### **Hy-Gard™**

4055, 4255, 4455.....	51 L (13.5 gal)
4055, 4255, 4455 (MFWD).....	60 L (15.9 gal)
4555, 4755, 4955.....	70.5 L (18.5 gal)
4555, 4755, 4955 (MFWD).....	75 L (20 gal)

#### **Transmission (QRT):**

##### **Hy-Gard™**

4055, 4255, 4455.....	60.5 L (16 gal)
4055, 4255, 4455 (MFWD).....	65.1 L (17.2 gal)
4555, 4755.....	101.8 L (26.9 gal)

#### **Mechanical Front Wheel Drive (MFWD):**

##### **GL-5 Gear Lubricant (85W-140)**

##### **4055, 4255, 4455**

Wheel Hubs.....	1.9 L (2 qt)
Axle Housing.....	11.4 L (3 gal)

##### **4555, 4755, 4955**

Wheel Hubs.....	2.8 L (3 qt)
Axle Housing.....	11.4 L (3 gal)

[Return to Filter Overview](#)

