


FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

7000 Series Self-Propelled Forage Harvesters 7200, 7300, 7400, 7500, 7700, 7800

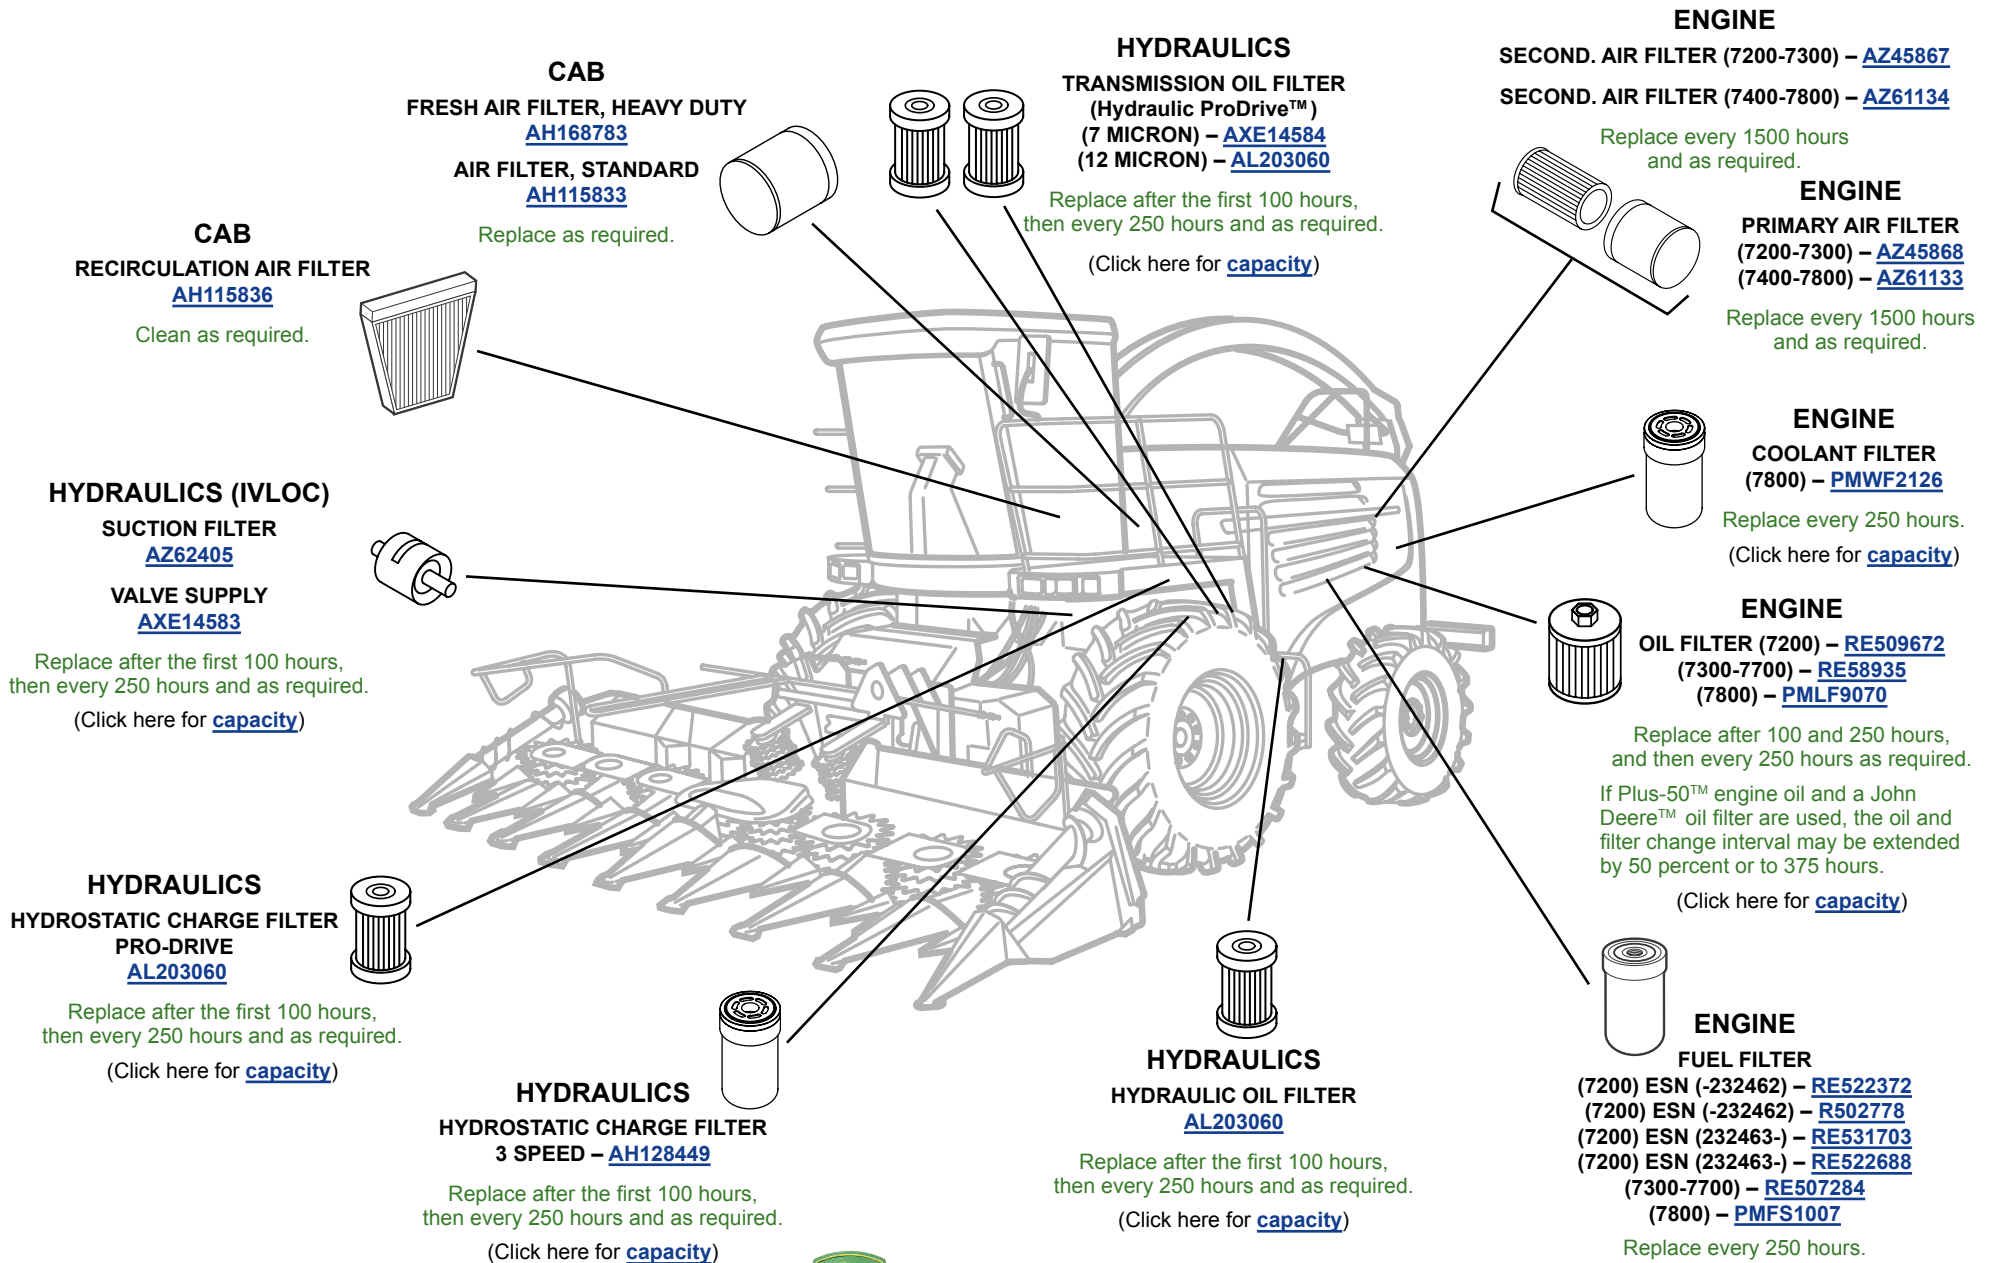

CAPACITIES

7000 Series Self-Propelled Forage Harvesters 7200, 7300, 7400, 7500, 7700, 7800

CAPACITIES (Approximate):

Fuel Tank:

7200-7300 (Standard)	700 L (185 gal)
7200-7300 (Optional).....	1100 L (290 gal)
7400-7500-7700-7800	1100 L (290 gal)

Cooling System (Complete):

Cool-Gard™

7200.....	56 L (14.8 gal)
7300-7400-7500-7700	71 L (18.7 gal)
7800.....	98 L (25.8 gal)

Engine with Filter:

Plus-50™

7200.....	28.5 L (7.5 gal)
7300-7400-7500-7700	42 L (11.1 gal)
7800.....	45 L (11.9 gal)

Transmission:

GL-5

.....	7 L (7.4 qt)
-------	--------------

Final Drives (Each):

GL-5

.....	8.5 L (9 qt)
-------	--------------

Rear Wheel Drive Rear Axle:

Hy-Gard™

Differential-Narrow Axle	15 L (3.7 gal)
Differential-Wide Axle	19.5 L (5.2 gal)
Reduction Gear	0.7 L (.7 qt)

Hydraulic System:

Hy-Gard™

Complete System	90 L (23.8 gal)
Complete System (ProDrive™)	97 L (25.6 gal)
Hydraulic Tank	46 L (12 gal)

ProDrive™:

Hy-Gard™

.....	13 L (3.4 gal)
-------	----------------

IVLOC:

Hy-Gard™

.....	19 L (5 gal)
-------	--------------

Brake System:

DOT3 or DOT4

Brake Fluid	1 L (1.1 qt)
-------------------	--------------

AC System:

R134A

Refrigerant.....	2350 L (82.9 oz)
------------------	------------------

[Return to Filter Overview](#)

